


Dept
Qty
DC 1
ED 1
IE 1
ISO 1
PD 1
R&D 1
SD 1
QA 1
QC 1
QE 1

CONNFLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights are strictly prohibited without prior written consent from CONNFLY. All intellectual properties provided herein are for reference purposes only and does not constitute authorization of its use in any format or manner. CONNFLY may enforce its intellectual property rights at its own discretion; failures or delays to exercise such rights does not constitute a waiver of such rights.

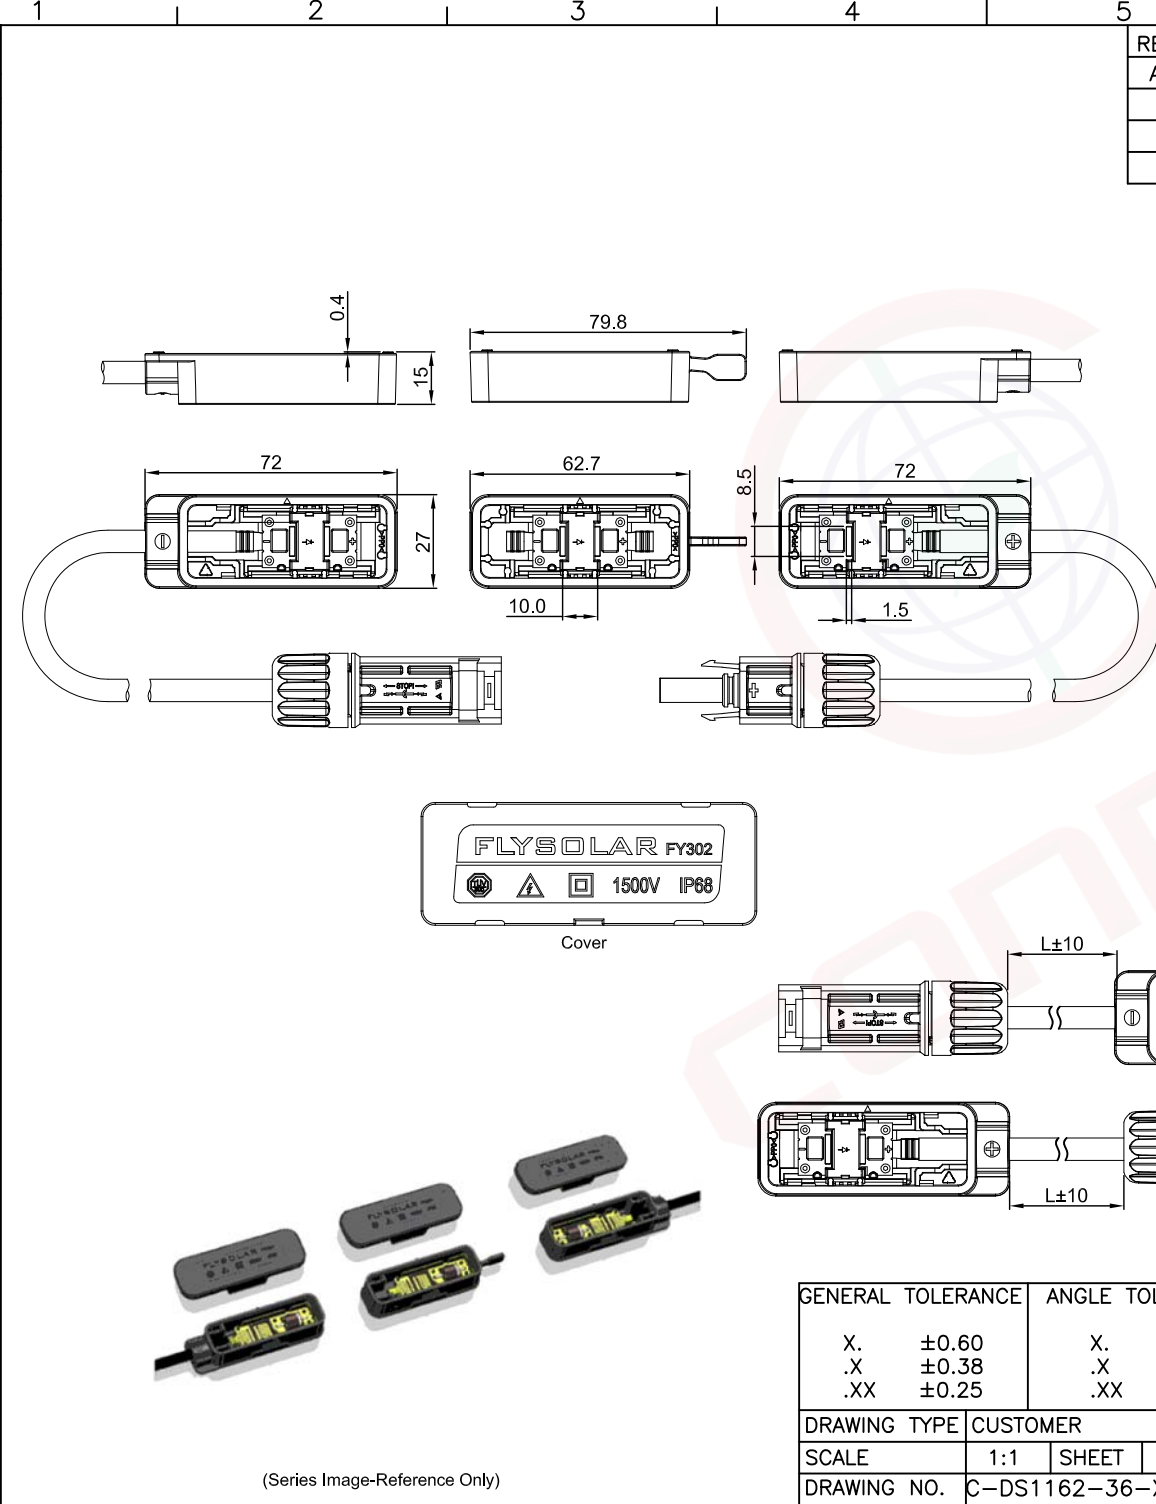

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 01/09/24'		

Notes:

Specifications:

1. Current Rating:20A~35A
2. Voltage Rating:1500V DC
3. Max Working Voltage:100V
4. Safety Class:Class II
5. Pollution Degree: I (Potted)
6. Flame Class:UL94-5VA
7. Protection Degree:IP68
8. Glue Volume:3*7.0mL
9. Temperature: -40°C~+85°C.

Materials:

1. Insulating material:Thermoplastic Black.
2. Contact material: Copper,Tin plated.
3. Cable:XLPE+Copper ,Tin plated.

Product Number Code:

DS1162-36 - X X X X X X

Cable Length(Dim L)
0800: 800mm
.....
Current Rating
20: 20A 25: 25A
30: 30A 35: 35A
Cable color
B: Black
Contact plating
6: Tin
Housing color
B: Black
No. of contacts
1T: 1 Set

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1162-36-XXXXX-A		

PROJECTION		TITLE	PV Junction Box	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1162-36	SERIES

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

(Series Image-Reference Only)